

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN
PHYSICO-MATHEMATICAL SERIES

ISSN 1991-346X

<https://doi.org/10.32014/2019.2518-1726.1>

Volume 1, Number 323 (2019), 5 – 13

ORCID 629.764.7

**B.T. Suimenbayev¹, V.I. Trushlyakov²,
G.T. Yermoldina¹, Zh.B.Suimenbayeva¹, A.M. Bapyshev¹**

(¹Institute of Information and Computational Technologies SC MES RK, Kazakhstan,

²Omsk State University MES RF, Russia)

ako-bapyshev@mail.ru

BUSINESS-PROCESS DEVELOPMENT OF THE INFORMATION-ANALYTICAL SYSTEMS OF THE BAIKONUR COSMODROM AND LAUNCH VEHICLE DESIGN FOR ECOLOGICAL SAFETY IMPROVING IN THE IMPACT AREAS OF THE WORKED-OFF STAGES

Abstract. The analysis of the existing information-analytical system (IAS) of the Baikonur cosmodrome (IAS_{cd}) and the launch vehicles design (IAS_{lv}) are carried out. The main sources of the technogenic impact of LV launching with the main liquid propulsion engines in the impact areas of worked-off stages (WS) are shown. The concept of modernization of the existing IAS_{cd} and IAS_{lv} is proposed, which provides for the reduction of the technogenic impact for none reusable expendable worked-off stages, based on operational recommendations of the created IAS_{lv} and IAS_{lv}^{es} on the fire-explosion safety of the worked-off stages, reducing the size of the impact areas of the worked-off stages, and the possibility of the worked-off stages maneuvering to change the impact area. Proposals for the modernization of the existing IAS_{cd} and the design concept for non-reusable LVs, based on the conditions for improving ecological safety, have been developed.

Key words: technogenic impact, falling areas, information analytical system, purposed medium rocket step, components of rocket fuel.

Introduction

The development of advanced LVs with the main liquid propulsion engines (LPE), in accordance with the accepted recommendations of such organizations as the UN's Technical Subcommittee on the Peaceful Uses of Outer Space [1], the Inter-Agency Space Debris Coordination Committee (IADC) [2] provides a significant reduction in the technogenic impact of LV launches with main LPE on the environment, including:

- prevention of pollution of the near-Earth space by the upper WS with the main LPE which are large explosive space debris;
- a drastic reduction in the number and areas of impact areas on the surface of the Earth for the lower WSs, which are fire hazardous and toxic objects, leading to the chemical contamination of soil with residues of liquid toxic propellant components such as unsymmetrical dimethylhydrazine, nitric acid, kerosene.

Developers and operators of LV with LPE are interested in applying technologies, schematic and design solutions aimed at increasing the ecological safety of LV to modern requirements, while the technical solutions should not worsen the achieved performance in terms of tactical and technical characteristics, reliability, use of proven technologies for the LV production, ground tests and operation.

The location of the Baikonur Cosmodrome is such that considerable areas of the impact areas of the lower WS are located on its own land territory of Russia and Kazakhstan. During the LV launches from the Baikonur cosmodrome, 28 impact areas (IA) are deployed in Russia (4.5 million hectares, including 0.12 million hectares in the Omsk Region, 0.96 million hectares in the Novosibirsk Region, 1.96 million

hectares in the Tomsk region, 0.4 million hectares in the Tyumen region, 0.53 million hectares in the Altai Republic, 0.15 million hectares in the Republic of Sakha (Yakutia)), 52 IAs in the Republic of Kazakhstan (4.6 million hectares), 4 IAs in the Republic of Turkmenistan (1.19 million hectares), 2 IAs in the Republic of Uzbekistan (0.17 million hectares) [3].

The impact areas of the lower WS in the USA, the European Union, Japan, India, Brazil are located in the waters of the World Ocean, therefore, the issues of ensuring ecological safety in the impact areas in comparison with Russia and Kazakhstan are virtually absent.

Of considerable interest are the works carried out in the United States on reusable lower WS, for example, launches of the rescued lower WS of LV "Falcon-9" [4], LV "Sheppard" [5], in which an attempt is made simultaneously to solve two basic problems arising in the rocket and space activities:

- reducing the cost of the payloads insertion due to the multi-use of the most expensive part of the LV with the main LPE (lower WS);
- reducing the technogenic impact of LV launches with the main LPE in the impact areas of the WS due to the return of the lower WS to the launch site, which is more important for Russia with its location of cosmodromes than for the USA.

In terms of the economic efficiency of such LVs (the ratio of the cost of the payload insertion into the specified orbit to the cost of the total payload insertion), we can refer to the experience of operating the Space Shuttle reusable transport space system (RTSS) using technology, schematic and design and construction solutions based on a manned aerodynamic (airplane) landing scheme. Operational experience has convincingly shown that the economic efficiency of the non-reusable LV is much higher than the efficiency of RTSS [6]. The data on the economic efficiency for the LV with the main LPE using technologies, schematic and design and construction solutions applied at the Falcon-9 LV in comparison with the economic efficiency of traditional non-reusable LVs in open press have not been detected, although work has been known to analyze the effect of the flight scheme of the stage with a rocket-dynamic rescue system for the energy characteristics of a two-stage medium-range LV [7].

Similar studies are being conducted in Russia, for example, the projects "Rossiyanka" [8], "Baikal" [9], "Demonstrator" [10], using both a rocket-dynamic maneuver for the soft landing [7] and aerodynamic maneuver (airplane landing scheme type of RTSS Space Shuttle, Buran) [8, 9].

The shortcomings of the technologies, schematic and design and construction solutions used in the above developments are significant losses in the payload mass, complex technical solutions that lead to the large volumes of ground testing and, accordingly, the high cost of the LV launch due to its multi-use [6].

The study [11, 12] formulated the main factors of the technogenic impact of the LV launches with the main LPE in the impact areas of lower WS and conceptual proposals for their cardinal reduction. These main factors include:

- unused liquid propellant residues components in tanks of the WS after the main LPE cut-off, which entails an increased probability of explosion of the fuel tanks both at the atmospheric section of the WS descent trajectory, and directly on the surface of the impact area, increasing the probability of fire hazard of vegetation cover inflammability;
- the presence of uncontrolled motion of the WS in the atmospheric section of the WS descent trajectory, which leads to a significant dispersion of the points of fall of the WS and its fragments, respectively, of the area of the impact areas with a probability of 10^{-4} of the non-reflection of a man [2].

Taking into account the conducted analysis, it is proposed to consider the concept of ensuring ecological safety (ES) based on the following postulates:

P1. The life cycle of the WS should not end, as it is implemented at the present time in the logic of the functioning of virtually all Russian launch vehicles launched from the Baikonur cosmodrome - achieving specified movement parameters, cutting-off the main LPE. Should still be implemented phase of the WS operating, by analogy with the spacecraft, providing for its transfer to the utilization orbit after the end of the active life. At this phase, the WS should ensure minimization of technogenic impact on the environment in the area of its expected fall.

P2. At the present stage of the study, it is not supposed to return the WS to the cosmodrome with its soft landing and subsequent reuse, similar to the first WS of the Falcon-9 LV.

P3. Ideal option - the fall of the WS with almost "dry" fuel tanks and fuel lines with a minimum deviation from the projected point of fall of the WS, located in the R-neighborhood from the energy-optimal point of fall of the WS.

Implementation of this concept involves:

1. The presence in the information and analytical system of IAS_{ia} , which is the part of the general IAS of the cosmodrome IAS_{cd} [13, 14], information on the ecological consequences of the WSfall to the initial predicted point of fall selected by the developer and operator of the launch vehicle, including:

- a) meteorological conditions in the neighborhood of point of fall,
- b) prediction of the possibility of vegetation fire taking into account climatic and meteorological conditions,
- c) the spread of the vapor cloud of the fuel component,
- d) alternative points of fall of the WS with the corresponding characteristics, etc. the above information must be generated

This information from the IAS_{ia} is necessary to make a decision by the LV developer for the purpose of developing technologies, schematic and design and construction solutions for improving the ecological safety of the LV in the impact area.

2. The presence in the IAS_{ia} information and analytical system, which is the part of the overall system for the design and exploitation of LV, the following information:

a) the possibility of changing the predicted coordinates of the point of fall of WS to the other recommended points in the impact area, where the ecological consequences due to the characteristics of the impact area [15, 16] will be significantly less;

b) options for changing the coordinates of the points of fall of the WS, for example, by changing the pitch program, yawing on the active section of the LV launching phase, [17] or by an additional autonomous on-board descent system (ABDS) installed on the WS [18], to implement the WS maneuver into other possible points of fall in the same designated impact area, but with more acceptable characteristics;

c) use of the energy optimal pitch program and the corresponding predicted optimal point of fall of the WS, while this point of fall must be in the R-neighborhood from the energy-optimal point of fall of the WS; The R-neighborhood is determined by the energy capabilities of the ABDS, the time of passive WS flight from the moment of separation from the LV to the moment of contact of the surface of the impact area.

In addition to the information received from the IAS_{ia} , which is necessary to improve the ecological safety of LV, the IAS_{lv} works on:

- a) minimization of fuel residues in tanks after cutting-off of the main liquid propulsion engine;
- b) assessment of the ABDS ballistic capabilities for the WS maneuvering on the trajectory of descent;
- c) estimation of the possible spillages of residual fuel components from collapsed fuel tanks and WS lines in the predicted WS point of fall;
- d) probability estimation of the WS explosion and the expected zone of fragment dispersion, etc.

1 Statement of the research problem

In accordance with the above analysis and the formulated concept, the general problem of improving the ecological safety of the LV with main LPE can be decomposed into three interrelated sub problems:

- development of IAS_{ia} as a component of the IAS_{cd} , determination of a list of additional tasks, mathematical models and software products that implement them;
- development of IAS_{lv}^{es} , as an integral part of the IAS_{ia} of the existing system of design and operation of LV, determination of a list of additional tasks, technologies, schemes and design solutions aimed at improving the ecological safety of LV;
- determination of the optimal interaction, information flows between the IAS_{ia} and IAS_{lv}^{es} , the criterion of optimality and boundary conditions.

2 Development of IAS_{ia}

The system of ecological monitoring of Baikonur Cosmodrome (SEMC) conceptually includes three main systems: the information-analytical system, the geo-information system and the monitoring system.

A number of works have been devoted to various aspects of the construction of such systems, for example, [14-16], in which the system of ecological monitoring of the Baikonur Cosmodrome was considered as part of the overall monitoring system, which it was possible to distinguish the component of the technogenic impact of the rocket and space activities on the environment. Figure 1 shows the general structure of the ecological monitoring of the Baikonur cosmodrome.

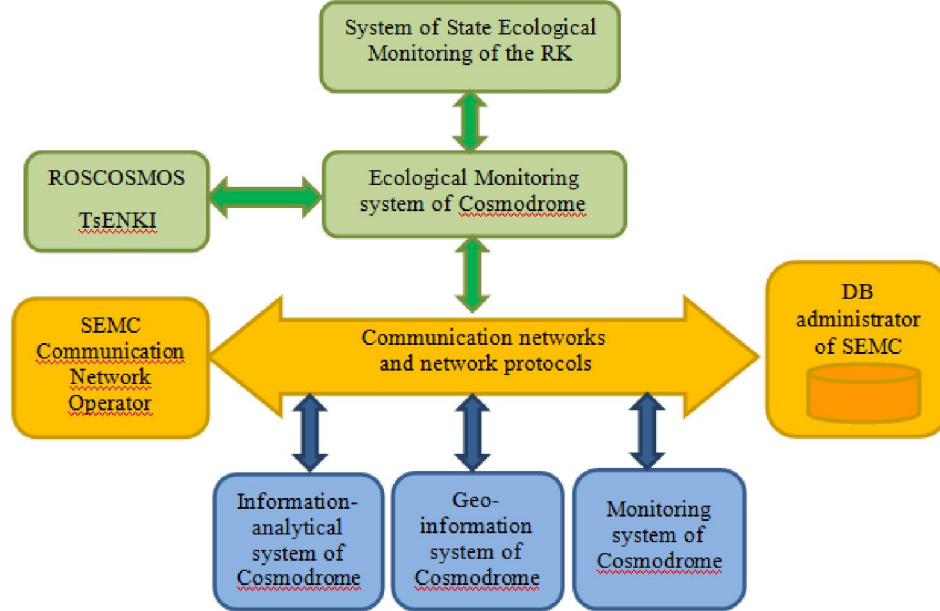


Figure 1 - System of ecological monitoring of Baikonur cosmodrome activity

The proposed approach is based on the separation of the IAS_{cd} functions into two parts: the basic IAS_{cdb} and IAS_{ia} .

The task of the IAS_{cdb} includes traditional assessments of the ecological monitoring of the Baikonur cosmodrome, based on obtaining information from the materials of the ecological certification of the impact areas of the WS in accordance with the passport of the IA [15, 16, 19]. These assessments include:

- general information about the enterprise responsible for the operation of the IA;
- general information about the impact area of the WS and adjacent territories;
- characteristics of natural and climatic conditions in the impact area territory;
- information on economic activities in the impact area and in adjacent territories;
- characteristics of pollution sources of the IA, etc. ;
- Calculation of ecological damage $E_i [\vec{R}_i(x_i, y_i)]$ and the cost of restoration work $C_i^{rw} [\vec{R}_i(x_i, y_i)]$

for each launch.

The task of IAS_{ia} includes:

a) from the received data on the upcoming LV launch from the IAS_{lv} (the initial aiming point of the WS fall in the assigned IA $\vec{R}_{aim}^{in}(x_i, y_i)$, the optimal aiming point at which the payload mass inserted to the specified orbit is maximal, dividing the area of the IA by N sections with S_i areas ($i = 1, \dots, N$), so that

$$\sum_{i=1}^N S_i = S_{\Sigma};$$

b) in the chosen N areas, N possible predictable coordinates of the points of fall of the WS are selected;

c) distances $\Delta \vec{R}_i = \vec{R}_{opt}(x, y) - \vec{R}_{pr}(x_i, y_i)$ are estimated for assessing the possibility of WS maneuvering by shifting the point of fall of the WS to these values and transmitted to the IAS_{lv} ;

d) on the basis of the passport of this IA, the ecological damage $E_i [\vec{R}_i(x_i, y_i)]$ from falling into this i -th section and, accordingly, the cost of restoration works, is calculated the each predicted point of fall $\vec{R}_i(x_i, y_i)$;

d) the received information is transmitted to the IAS_{lv} for the calculation of the LV movement control programs in the active section of the launch trajectory and the WS control programs in the descent section to the selected point, which is determined from the analysis of the data array $\{C_i^{sa}[\vec{R}_i(x_i, y_i)]\}$, the estimation of the ballistic capabilities of the ABDS for maneuvering by changing the coordinates of the point of the fall by a $\Delta\vec{R}_i = \vec{R}_{opt}(x, y) - \vec{R}_{pr}(x_i, y_i)$ value.

In Fig. 2, as an example, the impact area for the "Proton" LV is given.

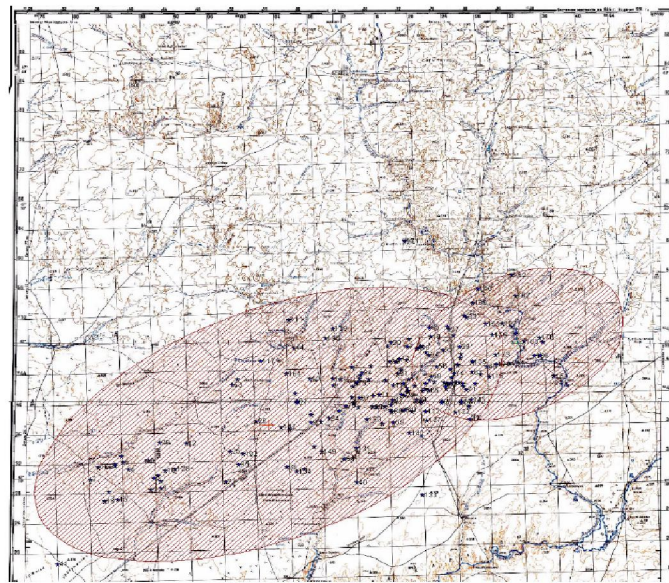


Figure 2 - The impact area for the "Proton" LV

As follows from Fig. 2, it is possible to ensure the fall of the WS into areas with significantly different landscape conditions. At the same time, it is assumed that an ABDS is installed on the WS, which provides control of the WS movement on the descent trajectory. As a result of this control, the accuracy of the WS fall is similar to the landing accuracy of the Falcon-9 LV WS when landing at a cosmodrome or a floating barge.

3 IAS_{lv}^{es} development

IAS_{lv}^{es} is an element of the existing IAS_{lv} , which includes information and analytical models of the LV, starting with the stage of formation of tactical and technical and technical tasks, including the choice of design and construction parameters for LV, design and construction, technological, production documentation including for testing at all stages of fabrication of the material part in the manufacturer), operational documentation (for work on the technical and launch complexes of LV), network schedules of the work plan for the various phases of the LV life cycle.

As noted above, the life cycle and, accordingly, the technological, schematic and design and construction solutions for LV, equipment for LV testing and checking are oriented to complete the cycle with a command to cut off the main LPE after achieving specified movement parameters and the payload separation. Further operation of the WS is a different kind of risks: explosion in the orbit, collision with other orbital objects before fires and pollution by WS fragments in the impact areas [1-3, 19].

IAS_{lv}^{es} development within the framework of the concept of improving the ecological safety of LV with main LPE in the impact areas of the WS provides for the use of information from the IAS_{ia} in several areas:

a) to change the program for controlling the movement of the launch vehicle at the launching phase (changing the points of aiming for the WS fall: the optimum point, an acceptable point from the condition of minimizing ecological damage, which is achieved by the adjusting the existing techniques for calculating LV launch programs);

b) to develop control of the WS movement with the ABDS use while moving along the trajectory of descent to the selected point on the territory of the WS impact area;

c) for the ABDS creation, which requires to complete a full cycle of its development with the assessment of the impact of the ABDS inclusion in the LV onboard equipment on the tactical and technical characteristics, reliability, operational properties and LV functioning;

d) determination of the ballistic capabilities of the ABDS for the displacement implementation of the coordinates of the WS point of fall by the value $\Delta \vec{R}_i = \vec{R}_{opt}(x, y) - \vec{R}_{pr}(x_i, y_i)$.

If the first two items a), b) are realizable within the existing IAS_{lv} , then the implementation of positions c), d) will require certain costs and time for the ABDS creation.

It is assumed that the ABDS development and its installation on Russian LV, in accordance with the proposed concept is objectively necessary, since the existing concept of design and operation of Russian LV with LPE does not satisfy a number of modern requirements. This follows from the analysis of the development of the trend of world rocket construction [1-10], in particular, the continuous increase in the requirements for environmental safety by both international and Russian legislation, increasing competition in the market of launch vehicles [1-10].

In accordance with the formulated concept of improving the ecological safety of LV with the main LPE [10, 11, 20, 22], it is proposed to develop an additional ABDS, which is assigned the main part to ensure the specified indicators for the ecological safety of LV in the WS impact area:

- extraction of unused fuel residues in tanks and WS lines after cutting off the main LPE on the WS trajectory of descending based on the technology of their transfer from the gas-liquid phase to the gas-vapor mixture [20];

- use of energy resources in the recovered vapor-gas mixture from fuel tanks to solve the problem of controlled descent of the WS [17, 18];

- development of algorithms for controlling the gas-reactive system, ensuring the WS descent at the specified point in the impact area from the condition of minimum costs for compensation of environmental damage $\{C_i^{sa}[\vec{R}_i(x_i, y_i)]\}$.

4 Interaction of IAS_{cd} and IAS_{lv}

The interaction between IAS_{cd} and IAS_{lv} , like any information exchange between complex technical systems, has an iterative character, which can be divided into several stages and levels, both with the readiness of each of the IAS and the current tasks to be solved by each IAS.

1. At the current level, the primary task is to create an IAS_{ia} and to create a database for each impact area of the most acceptable WS points of fall from the condition $\min \min \{C_i^{sa}[\vec{R}_i(x_i, y_i)]\}$.

2. Stages of interaction IAS will be determined by the creation terms of both mathematical models, software products, and material systems that implement them, in particular, the IAS_{ia} database, the degree of readiness of the ABDS.

3. The received information is necessary for conducting research within the framework of the IAS_{lv}, IAS_{lv}^{es} for the following purposes:

a) the synthesis of various programs for the LV movement control in the launching phase, without taking into account the limitations on the WS impact areas (calculation $\vec{R}_{opt}(x, y)$);

b) an estimate of the distance $\Delta \vec{R}$ between $\vec{R}_{opt}(x, y)$ and the recommended WS points of fall, obtained in the IAS_{ia} , from the condition $\min \{C_i^{sa}[\vec{R}_i(x_i, y_i)]\}$;

c) development of proposals for changing the design and construction parameters of the WS for the maneuver implementation on the trajectory of descent.

4. The hierarchy of each IAS, the levels of interaction of the IAS_{ia} and IAS_{lv}

In Fig. 3 shows a general schematic diagram of information flows between the IAS_{ia} and IAS_{lv}

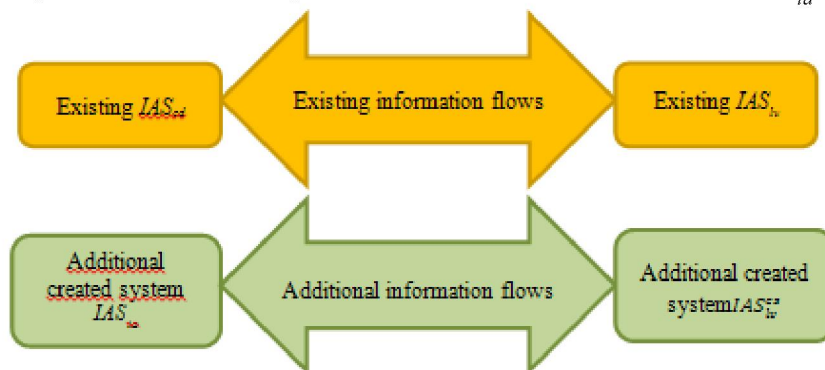


Figure 3 - The general schematic diagram of information flows between IAS_{cd} , IAS_{lv} , IAS_{ia} , IAS_{lv}^{es}

Realization of the presented concept of increasing the ecological safety of the launch vehicle with the main LPE will significantly reduce the ecological load on the environment in the impact areas of the Baikonur cosmodrome due to a drastic reduction in the areas of impact areas (controlled descent of the WS), a significant reduction in the probability of vegetation fires (due to the almost complete recovery of liquid residues fuel), the choice of the safest (from the ecological point of view) points of the WS fall on the territory of the designated impact area. The volumes and costs of the IAS_{ia} , IAS_{lv}^{es} creation will be determined at the next stages of the research.

5 Conclusions

1 The analysis of modern tendencies of increase of ecological safety of LV with LPE is carried out. The main factors affecting the level of environmental damage in the impact area of the WS are given.

2 The concept of reducing the technogenic impact in the impact areas of the Baikonur Cosmodrome for non-reusable non-escaped WS is formulated, based on the operational recommendations of the IAS_{ia} to the IAS_{lv} , the composition of the information for exchange between the IAS_{ia} and IAS_{lv} is determined.

3 Proposals have been developed for the development of the design methodology for IAS_{ia} to assess the technogenic impact of LV launching on the selected fall area integrated into the general information analytic system of the Baikonur cosmodrome.

4 Proposals for the IAS_{lv} creation to improve the ecological safety of LV with main LPE in the impact areas are developed on the basis of upgrading the control programs for LV launches at the active phase of the launch trajectory, the programs for controlling the movement of the WS at the atmospheric portion of the descent trajectory, and the use of ABDS.

6 Gratitude

The research was carried out with the support of the grant of the Ministry of Education and Science of the Republic of Kazakhstan AP05131162 of 02.02.2018 and the state contract of the state corporation Roskosmos No.4770233880271660000450 of 28.08.16.

Б.Т. Суйменбаев¹, В.И. Трушляков², Г.Т. Ермолдина¹, Ж.Б. Суйменбаева¹, А.М. Батышев¹

¹Институт информационных и вычислительных технологий, Алматы, Казахстан

² Омский государственный технический университет, Омск, Россия

РАЗРАБОТКА БИЗНЕС-ПРОЦЕССА ИНФОРМАЦИОННО-АНАЛИТИЧЕСКИХ СИСТЕМ КОСМОДРОМА БАЙКОНУР И ПРОЕКТИРОВАНИЯ РАКЕТЫ-НОСИТЕЛЯ ДЛЯ ПОВЫШЕНИЯ ЭКОЛОГИЧЕСКОЙ БЕЗОПАСНОСТИ В РАЙОНАХ ПАДЕНИЯ ОТРАБОТАВШИХ СТУПЕНЕЙ

Аннотация. Проведён анализ существующих информационно-аналитических системы (ИАС) космодрома Байконур ИАСкд и проектирования ракет-носителей (РН) ИАСрн. Показаны основные источники

возникновения техногенного воздействия пусков РН с маршевыми ЖРД в районах падения отработавших ступеней (ОС). Предложена концепция модернизации существующих ИАСкд и ИАСрн, обеспечивающая снижение техногенного воздействия для одноразовых неспасаемых ОС, основанная на оперативных рекомендациях создаваемых ИАСрп и по обеспечению пожаровзрывобезопасности ОС, снижения размеров площади падения ОС, возможности манёвра ОС для изменения района падения. Разработаны предложения по модернизации существующей ИАСкд и концепции проектирования одноразовых РН, исходя из условий повышения экологической безопасности.

Ключевые слова: техногенное воздействие, районы падения, информационная аналитическая система, отработавшая ступень ракеты-носителя, компоненты ракетного топлива

Б.Т. Сүйменбаев¹, В.И. Трушляков², Г.Т. Ермолдина¹, Ж.Б. Сүйменбаева¹, А.М. Батышев¹

¹ Ақпараттық және есептеу технологиялар институты, Алматы, Қазақстан

² Омбы мемлекеттік техникалық университеті, Омбы, Ресей

«БАЙҚОҢЫР» ҒАРЫШ АЙЛАҒЫНЫҢ АҚПАРАТТЫҚ-ТАЛДАУ ЖҮЙЕЛЕРІ ҮШІН БИЗНЕС-ҮДЕРІСТІ ДАМУ ЖӘНЕ ҚҰЛАУ АЙМАҚТАРДА ӨТЕЛГЕН САТЫЛАРДЫҢ ЭКОЛОГИЯЛЫҚ ҚАУІПСІЗДІКТІ ЖАҚСARTY ҮШІН ЗЫМЫРАН ТАСЫМАЛДАУШЫЛАРДЫ ЖОБАЛАУ

Аннотация. Байқоңыр ғарыш айлағының қазіргі заманғы ақпараттық-талдау жүйелерін (АТЖ) және АТЖ_{ға} ұшыру аппараттарын жобалауды талдау жүргізілді. Зымыран қозғалтқыштары бар ұшыру аппараттарының өтелген сатылардағы (ӨТ) антропогендік әсерінің негізгі көздері көрсетілген. АТЖ-мен жасалған жедел ұсыныстарды негізге ала отырып, ОС-ның өрт және жарылыс қауіпсіздігін қамтамасыз ету, ОҚ-ның құлау аймағының көлемін азайту, құлау аймағын өзгерту үшін ОС-ты маневр жасау, бір реттік қауіпсіздіктегі ОС-ға антропогендік әсерін төмендетуді қамтамасыз ететін қолданыстағы АТЖ_{ға} және АТЖ_т жаңғырту тұжырымдамасы. Қолданыстағы АТЖ_{ға} жаңғырту және экологиялық қауіпсіздікті жетілдіруге негізделген бір реттік бірліктерді жобалау тұжырымдамасы бойынша ұсыныстар әзірленді.

Түйін сөздер: техногендік әсерлер, құлау аймағы, ақпараттық-талдау жүйесі, зымыран тасымалдаушының өтелген сатысы, зымырандық отын компоненттері

REFERENCES

- [1] Space Debris Mitigation Guidelines of the Committee on the Peaceful Uses of Outer Space. United Nations Office for Outer Space Affairs/ Vienna, 2010 - www.unoosa.org (Date call 30.04.2017 in Russ.).
- [2] IADC space debris mitigation guidelines www.iadc-online.org (Date call 25.05.2017 in Russ.).
- [3] Shatrov, Ya.T. Ensuring ecological safety of rocket and space activities. / Shatrov Ya.T. Korolev city, Mosk.dist. : Pub. TsNIIMash. 2009. in 3 books.
- [4] Falcon 9 attempts ocean platform landing. <http://www.spacex.com/news/2014/12/16/x-marks-spot-falcon-9-attempts-ocean-platform-landing>, свободный (Date call: 30.04.2017 in USA.).
- [5] The New Shepard system <https://www.blueorigin.com/technology> (Date call: 30.04.2017 in USA.).
- [6] Spacecrafts of multi-use. <http://timemislead.com/kosmonavtika/kosmicheskije-korabli-mnogorazovogo-ispolzovaniya> (Date call 27.07.18 in Russ.).
- [7] Kuznetsov Yu.L., Ukrainsev D.S. Analysis of the effect of the stage flight scheme with a rocket-dynamic rescue system on the energy characteristics of a two-stage medium-sized launch vehicle // Bulletin of the Samara State Aerospace University named after Academician S.P. Korolev (National Research University). 2016. T. 15, No. 1. P. 73-80. DOI: 10.18287/2412-7329-2016-15-1-73-80 (in Russ.).
- [8] Launch vehicle "Rossiyanka" - <http://makeyev.ru/roospace/rossiyanka/>, free (Date call: April 30, 2017 in Russ.).
- [9] Reusable accelerator Baikal. [Electronic resource]. Access mode: <http://npo-molnija.ru/uskoritel-baikal>, free (Date call: 30.04.2017 in Russ.).
- [10] Reusable space rocket system of the ultralight class "Demonstrator" https://fpi.gov.ru/press/news/opredelen_oblik_perspektivnoy_mnogorazovoy_raketno_kosmicheskoy_sistemi (Date call 29.07.10 in Russ.).
- [11] Trushlyakov V., Shatrov Ya., Improving of technical characteristics of launch vehicles with liquid rocket engines using active onboard de-orbiting systems // Acta Astronautica <https://doi.org/10.1016/j.actaastro.2017.05.018> (in Russ.).
- [12] Trushlyakov V., Shatrov Ya., Sujmenbayev B., Baranov D., The designing of launch vehicles with liquid propulsion engines ensuring fire, explosion and environmental safety requirements of worked-off stages // Acta Astronautica. 2017. Vol. 131. pp. 96-101 (in USA).

- [13] Suimenbayev, B.T. Ecological safety of rocket and space systems operation. / Almaty: Publishing house "Giga trade". 2009. 240 p (in Kaz).
- [14] Theory and practice of operating space infrastructure facilities / St. Petersburg; BHV-Petersburg, 2006. 400 p (in Russ.).
- [15] Suimenbayev, B.T. On the creation of a multi-level system for environmental monitoring and forecasting the state and stability of environmental objects of the Baikonur cosmodrome and the impact areas of the SSLV // Vestnik of the Academy of Sciences of the Republic of Kazakhstan. Almaty, 2005. №6 (in Kaz.).
- [16] Trushlyakov V.I., Kudentsov V.Yu., Shatrov Ya.T., Agapov I.V. The method of descending the separating part of the stage of launch vehicle and a device for its implementation / Pat.2414391 Ros. Federation, IPC B64D1 / 26, B64C15 / 14; Omsk State Technical University. No. 2009123768/11; claimed. 22.06.09; publ. 20.03.11, Bul. № 8 (in Russ.).
- [17] Trushlyakov V.I., Kudentsov V.Yu., Shatrov Ya.T. The method of control of space rockets / Pat. 2456217 Ros. Federation, IPC B64G1 / 40, D64G1 / 24; Omsk State Technical University. Application No. 2010113169/11; claimed. 05/04/10; publ. July 20, Bul. No. 20 (in Russ.).
- [18] Avdoshkin V. V. Problematic issues of using the traces of launches of space vehicles and impact areas of separating parts of launch vehicle: monograph / V.V. Avdoshkin, N.F. Averkiev, A.A. Ardashov and others; Ed. A.S. Fadeeva, N.F. Averkieva. SPb.: MSA named after A.F. Mozhaiskogo, 2016. 372 p. (in Russ.).
- [19] Baranov D.A., Makarov Yu.N., Trushlyakov V.I., Shatrov Ya.T. The project of creating an autonomous on-board system for removing the worked-off stages of launch vehicles in the assigned areas / Astronautics and rocket science No. 50 (84), 2015. P. 76 - 82. (in Russ.).
- [20] Baranov D.A., Lempert D.B., Trushlyakov V.I., Shatrov Ya.T. Development of an on-board evaporation system for unused residual fuel in the tanks of the separating part of the LV stage // Cosmonautics and rocket science-2017-6 (99). p. 93–103. (in Russ.).
- [21] Y.T. Shatrov, D.A. Baranov, V.I. Trushlyakov, V.Yu. Kudentsov, D.V. Sitnikov, D.B. Lempert. Technologies for reducing the technogenic impact of launch vehicle launches on the environment // Bulletin of the Samara State Aerospace University. T. 15. No. 1. 2016. P. 139 - 150 // DOI: 10.18287/2412-7329-2016-15-1-139-150. (in Russ.).
- [22] Trushlyakov V.I., Kudentsov V.Yu., Sitnikov D.V. The way of descent of the separating part of the launch vehicle stage and the device for its realization / Pat.No. 2581894 Ros.Federation, IPC B64G 1/26, B64C 15/14; Omsk State Technical University. Application No. 2105104530; claimed. 10.02.15 Released on 04/20/2016 Byul. №11. (in Russ.).